



Ultimate painting solution for your dream home

WEATHERCOAT BIO-WASH



PRODUCT DESCRIPTION

This is a unique solution having wide spectrum of biocidal efficacy that provides strong protection of your painted wall prone to continuous damp & moisture. The optimal and effective combination of biocides makes it excellent tonic against algal, fungal, molds & lichens growth.



ANTIFUNGAL
& ANTI ALGAL



READY TO USE



ENVIRONMENT
FRIENDLY



PRODUCT INFORMATION


PACK SIZES




0.91 Ltr

3.64 Ltr

COVERAGE

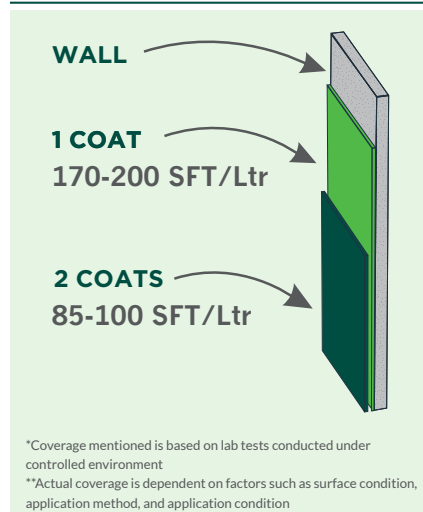

UNIQUE FEATURE

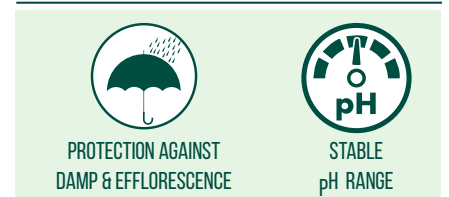

SURFACE PREPARATION



Old painted surface
having filthy look of
algae & Fungi



For old/damp/affected bare surface: Clean the entire wall/affected portion of the wall properly with wire/nylon brush, then clean with water. Now apply W/C bio-wash with brush or roller on the surface for proper hygiene and cleanability. Now the surface is ready for paint application.

For old affected painted surface: Clean the entire wall/affected portion of the wall properly with a soft nylon brush, then clean with water. Now apply 02 coats W/C bio-wash with brush or roller on the surface for proper hygiene and cleanability. Then allow the surface minimum 24 hours to dry for the proper action of bio-wash before paint application.

Berger offers a complete range of surface treatment solutions, please call 08000-123456 or visit your nearest Berger Experience Zone for more information.



METHOD OF APPLICATION




Clean the affected areas with nylon/wire brush and wash with water



Apply 2 coats of Weather-coat Biowash with brush/roller maintaining 6-8 hours interval



Wait at least 12 hours to dry after the second coat



Apply paint following the proper method



MIXING RATIOS

Ready to Apply
(No need to Thin)



ADDITIONAL INFORMATION

- ◆ No need to thin
- ◆ Do not stretch material beyond recommended coverage
- ◆ Do not apply paint at a temperature below 10°C (50°F)



ACCOMPANYING PRODUCT

N/A



SHEEN SCALE

N/A




PRODUCT SPECIFICATION



TOUCH DRY



VISCOSITY AT
30°C




METHOD OF APPLICATION



ROLLER BRUSH




HARD DRY



*For finish coat application after 24 hrs



SOLVENT



WATER

ETHYLENE
GLYCOL




SHELF LIFE



In sealed container kept in cool & dry place



AROMATIC CONTENT



VOC

< 25 g/L



COATING INTERVAL



% TOTAL SOLIDS (WEIGHT)

Max 3.6



% TOTAL SOLIDS (VOLUME)

Max 4.0

*Please refer to MSDS for safety information

The above information is given to the best of our knowledge based on laboratory tests and practical experience. However, since we cannot anticipate or control the many conditions under which our products may be applied, we can only guarantee the quality of the product itself. We reserve the right to alter the given data without prior notice. Covering capacity is indicated based on results obtained on a prepared smooth surface.